

**FIG. 1** 

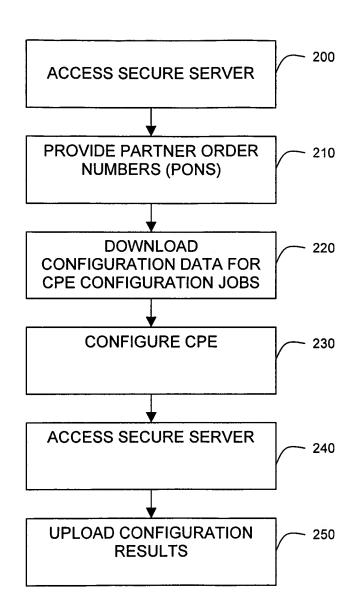


FIG. 2

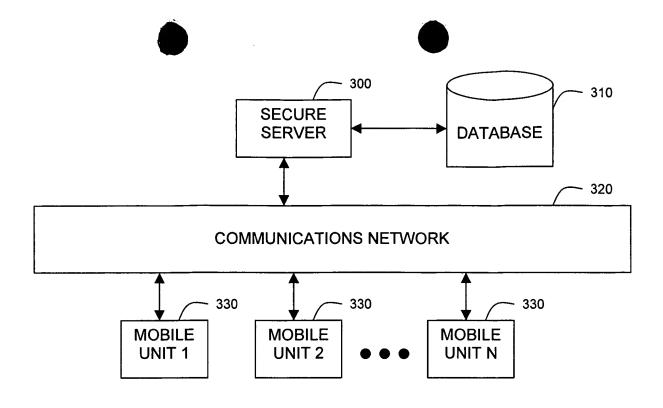


FIG. 3

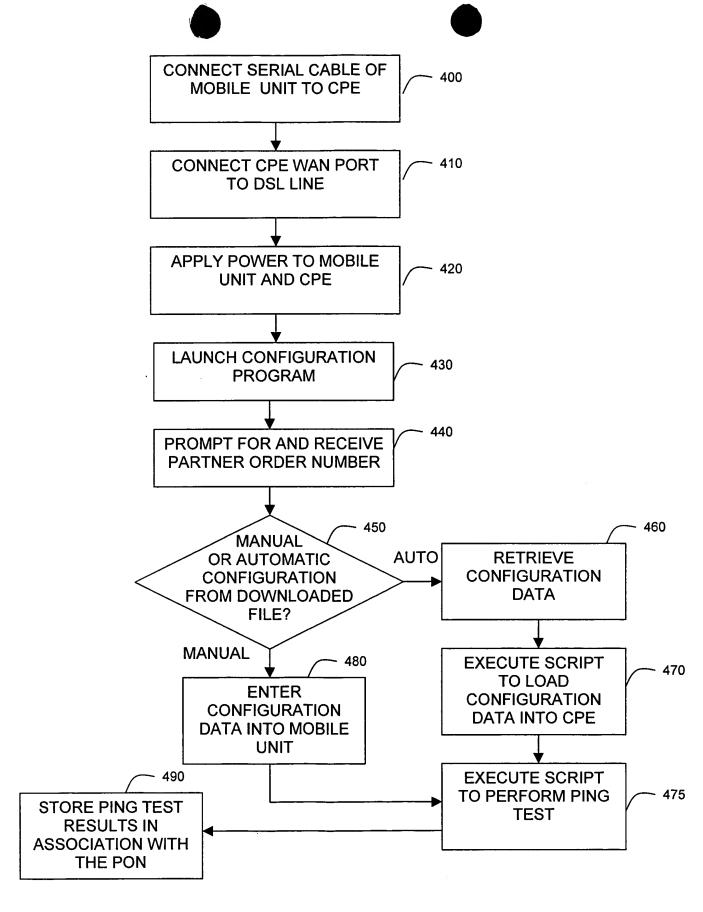
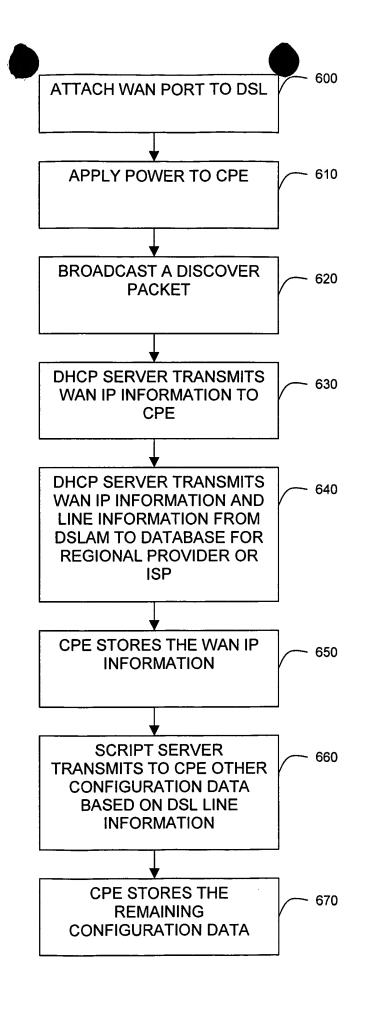


FIG. 4

, Manual			
Fa 2, 44 6	Configuration Tool		
RC A B A B RC	OUTER MODEL NO.	50	00
<b>化低热性物料</b>	PON: W89484	A COLOR	
ISP Router WAN IP (Gateway):	10 10 11 1		
End User CPE WAN IP:	10 . 10 . 11 . 124		
WAN Subnet Mask:	255 255 0		
Network Model:	© FR (1490) C ATM (MER-1483)		
DLCI:	16		
		***	
NAT:	O ON O OFF		
CPE Ethernet IP:	209 68 236 113		
LAN Subnet Mask:	255 255 2 240		
Domain Name:	Cts.com		
Primary Domain Name Server:	[192] <u>[188] [72] [18]</u>		
Secondary Domain Name Server:	192 188 72 21		
Submit Configuration	Back to Main Menu	EXI	

FIG. 5



**FIG.** 6